

wall mounting socket outlet - straight, housing dimensions 102x102 mm




| Product description | |
|---------------------------|---|
| BALS-Prd.-Nr | 110549 |
| EAN | 4024941938440 |
| product group | Wall mounting socket outlet Quick-Connect |
| current | 16A |
| number of poles | 5p |
| Arrangement of the phases | 3p+N+PE |
| position of earth contact | 6 h |
| voltage (V) | 200/346 up to 240/415V |

| Product description | |
|-----------------------------|--|
| frequency | 50 and 60Hz |
| protection degree | IP44 |
| colour code | red RAL 3000 |
| Colour of appliance | Hinged lid red, Enclosure grey |
| connection design | screwless sping/cage/kontex |
| maximum conductor size (LQ) | 4,0 qmm |
| cable entry (KE) | 3 sides 2x M20/25, 1 side 1x M20/25, to break out |
| Height | 102mm |
| Width | 102mm |
| Depth | 123mm |
| dimension of enclosure (GG) | 102x102 mm (HxW) |
| material of enclosure | Polyamide |
| contact | The contact carrier is made of polyamide, The contacts are brass |

| Additional technical information | |
|----------------------------------|------------------------------------|
| | All cable entries are to break out |

| Logistics data | |
|----------------|------------------|
| Weight/pcs | 0.339 kg / Piece |
| Packaging | Bag |
| Content amount | 1 ST |

| Logistics data | |
|----------------|---------------|
| EAN | 4024941938440 |
| Length | 123 mm |
| Width | 102 mm |
| Height | 100 mm |
| Weight | 0.34 kg |
| Volume | 1,254.6 ccm |
| Packaging | Carton |
| Content amount | 10 ST |
| EAN | 4024941827164 |
| Length | 330 mm |
| Width | 216 mm |
| Height | 260 mm |
| Weight | 3.616 kg |
| Volume | 17,062.5 ccm |

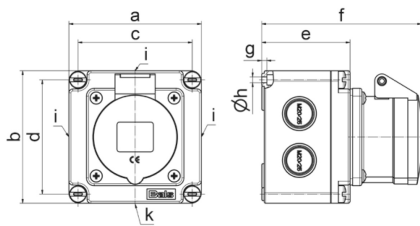

1 MB 120

| Ampere Polzahl | 16 3 | 16 4 | 16 5 | 32 3 | 32 4 | 32 5 |
|----------------------------|----------|----------|----------|----------|----------|----------|
| a | 102,0 | 102,0 | 102,0 | 102,0 | 102,0 | 102,0 |
| b | 102,0 | 102,0 | 102,0 | 102,0 | 102,0 | 102,0 |
| c | 88,0 | 88,0 | 88,0 | 88,0 | 88,0 | 88,0 |
| d | 88,0 | 88,0 | 88,0 | 88,0 | 88,0 | 88,0 |
| e | 68,0 | 68,0 | 68,0 | 68,0 | 68,0 | 68,0 |
| f | 119,0 | 121,0 | 122,0 | 130,0 | 130,0 | 131,0 |
| g | 4,0 | 4,0 | 4,0 | 4,0 | 4,0 | 4,0 |
| h ø | 4,5 | 4,5 | 4,5 | 4,5 | 4,5 | 4,5 |
| i | 2xM20/25 | 2xM20/25 | 2xM20/25 | 2xM20/25 | 2xM20/25 | 2xM20/25 |
| k | M20/25 | M20/25 | M20/25 | M20/25 | M20/25 | M20/25 |
| Leiter mm ² min | 1,5 | 1,5 | 1,5 | 2,5 | 2,5 | 2,5 |
| Leiter mm ² max | 4 | 4 | 4 | 10 | 10 | 10 |