

## wall mounting socket outlet - straight, housing dimensions 102x102 mm




| Product description       |  |
|---------------------------|--|
| BALS-Prd.-Nr              | 110560                                       |
| EAN                       | 4024941938570                                |
| product group             | TE wall mounting socket outlet Quick-Connect |
| current                   | 16A  |
| number of poles           | 3p   |
| Arrangement of the phases | 2P+PE  |
| position of earth contact | 4 h  |
| voltage (V)               | 100 up to 130V                               |

| Product description         |  |
|-----------------------------|--|
| frequency                   | 50 and 60Hz  |
| protection degree           | IP67   |
| colour code                 | yellow RAL 1012  |
| Colour of appliance         | Hinged lid yellow, Enclosure grey  |
| connection design           | screwless sping/cage/kontex  |
| maximum conductor size (LQ) | 4,0 qmm  |
| cable entry (KE)            | 3 sides 2x M20/25, 1 side 1x M20/25, to break out  |
| Height                      | 102mm  |
| Width                       | 102mm  |
| Depth                       | 125mm  |
| dimension of enclosure (GG) | 102x102 mm (HxW)   |
| material of enclosure       | Polyamide  |
| contact                     | The contact carrier is made of high temperature resistant material, the contacts are brass nickel plated |

| Additional technical information |                                    |
|----------------------------------|------------------------------------|
|                                  | All cable entries are to break out |

| Logistics data |                 |
|----------------|-----------------|
| Weight/pcs     | 0.34 kg / Piece |
| Packaging      | Bag             |
| Content amount | 1 ST            |

| Logistics data |               |
|----------------|---------------|
| EAN            | 4024941938570 |
| Length         | 125 mm        |
| Width          | 102 mm        |
| Height         | 102 mm        |
| Weight         | 0.341 kg      |
| Volume         | 1,300.5 ccm   |
| Packaging      | Carton        |
| Content amount | 10 ST         |
| EAN            | 4024941828406 |
| Length         | 325 mm        |
| Width          | 217 mm        |
| Height         | 210 mm        |
| Weight         | 3.606 kg      |
| Volume         | 13,588.4 ccm  |

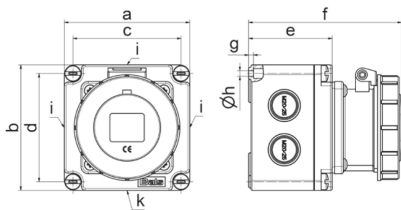

| Ampere Polzahl             | 16<br>3  | 16<br>4  | 16<br>5  | 32<br>3  | 32<br>4  | 32<br>5  |
|----------------------------|----------|----------|----------|----------|----------|----------|
| a                          | 102,0    | 102,0    | 102,0    | 102,0    | 102,0    | 102,0    |
| b                          | 102,0    | 102,0    | 102,0    | 102,0    | 102,0    | 102,0    |
| c                          | 88,0     | 88,0     | 88,0     | 88,0     | 88,0     | 88,0     |
| d                          | 88,0     | 88,0     | 88,0     | 88,0     | 88,0     | 88,0     |
| e                          | 68,0     | 68,0     | 68,0     | 68,0     | 68,0     | 68,0     |
| f                          | 124,0    | 125,0    | 124,0    | 134,0    | 134,0    | 134,0    |
| g                          | 4,0      | 4,0      | 4,0      | 4,0      | 4,0      | 4,0      |
| h ø                        | 4,5      | 4,5      | 4,5      | 4,5      | 4,5      | 4,5      |
| i                          | 2xM20/25 | 2xM20/25 | 2xM20/25 | 2xM20/25 | 2xM20/25 | 2xM20/25 |
| k                          | M20/25   | M20/25   | M20/25   | M20/25   | M20/25   | M20/25   |
| Leiter mm <sup>2</sup> min | 1,5      | 1,5      | 1,5      | 2,5      | 2,5      | 2,5      |
| Leiter mm <sup>2</sup> max | 4        | 4        | 4        | 10       | 10       | 10       |

1 MB 121