

panel mounting socket outlet, straight - 7 poles, flange 75x75




Product description	
BALS-Prd.-Nr	13328
EAN	4024941133289
Product category	GT panel mounting socket outlet straight
Current	32A
Number of poles	7p
Number of poles	6p+PE
Position of earth contact	9 h
Voltage	230V

Product description	
Frequency	50 and 60Hz
Protection degree	IP44
Colour code	blue RAL 5015
Colour of appliance	Hinged lid blue RAL 5015, Enclosure grey RAL 7035
Connection design	with screw terminal
Maximum conductor size	10,0 qmm
Cable entry	null
Height	98mm
Width	75mm
Depth	82mm
Flange size vertical	75mm
Flange size horizontal	75mm
Drill hole distance vertical	60mm
Drill hole distance horizontal	60mm
Material of enclosure	Polyamide
Contact	The contact carrier is made of high temperature resistant material, The contacts are brass

Logistics data	
Weight/pcs	0.27 kg / Piece
Packaging	Bag
Content amount	1 ST

Logistics data	
EAN	4024941133289
Length	82 mm
Width	75 mm
Height	98 mm
Weight	0.271 kg
Volume	602.7 ccm
Packaging	Carton
Content amount	10 ST
EAN	4024941959032
Length	245 mm
Width	177 mm
Height	185 mm
Weight	2.833 kg
Volume	7,140 ccm

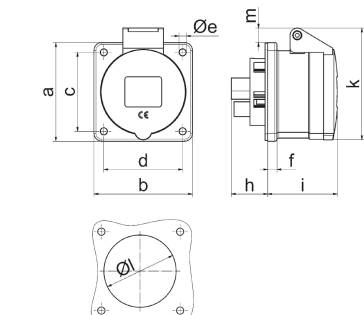

4 MB 389

	16	32					
Ampere	16	32					
Polzahl	7	7					
a	75,0	75,0					
b	75,0	75,0					
c	60,0	60,0					
d	60,0	60,0					
e ø	5,5	5,5					
f	7,0	8,0					
h	28,0	38,0					
i	53,0	62,0					
k	85,0	98,0					
l ø	60,0	60,0					
m	11,0	17,0					
Leiter mm ² min	1,5	2,5					
Leiter mm ² max	4	10					