


panel mounting socket outlet, straight - flange 130x130,
fixing centers 104x104

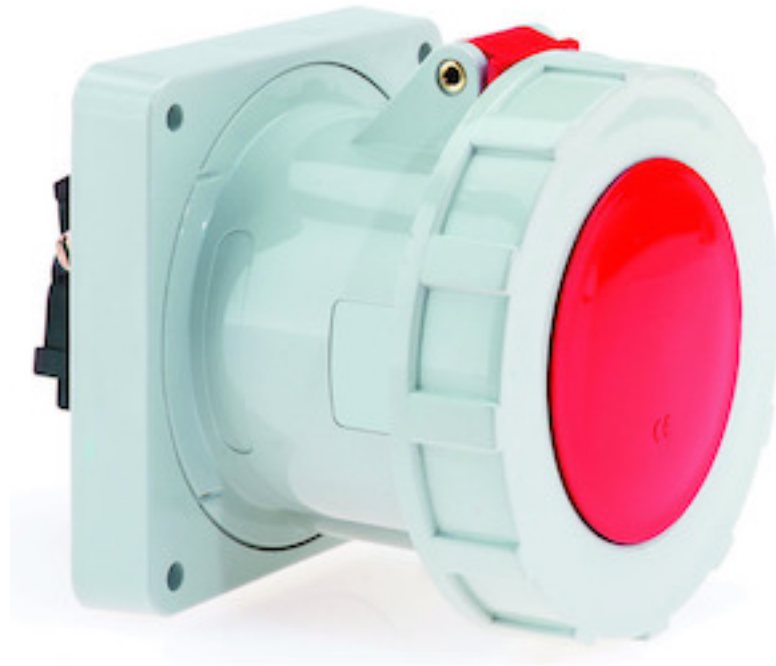


Product description	
BALS-Prd.-Nr	13436
EAN	4024941134361
product category (PG)	GT panel mounting socket outlet straight
current (A)	125A
number of poles (P99)	5p
number of poles (P)	3p+N+PE
position of earth contact (H)	6 h
voltage (V)	200/346 up to 240/415V

Product description	
frequency (HZ)	50 and 60Hz
protection degree (SA)	IP67
colour code 1 (KF1)	red RAL 3000
Colour of appliance	Hinged lid red, Bayonet ring grey, Enclosure grey
connection design (AT)	screw terminal as box terminal with Kontex-contact
maximum conductor size (LQ)	70.0 qmm
cable entry (KE)	null
Height	130mm
Width	130mm
Depth	166mm
Flange size vertical	130mm
Flange size horizontal	130mm
Drill hole distance vertical	104mm
Drill hole distance horizontal	104mm
material of enclosure (GM)	Polyamide
contact	The contact carrier is made of high temperature resistant material, the contacts are brass nickel plated

Logistics data	
Weight/pcs	1.139 kg / Piece
Packaging	Bag
Content amount	1 ST

Logistics data	
EAN	4024941134361
Length	129 mm
Width	125 mm
Height	129 mm
Weight	1.14 kg
Volume	2,080.125 ccm
Packaging	Carton
Content amount	5 ST
EAN	4024941968874
Length	330 mm
Width	216 mm
Height	260 mm
Weight	5.921 kg
Volume	17,062.5 ccm

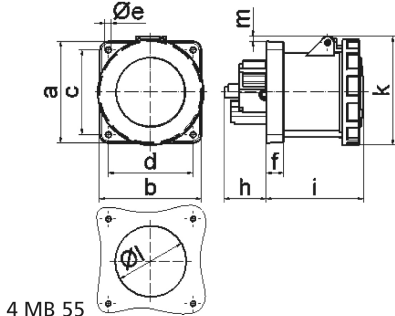

4 MB 55

Ampere Polzahl	125 3	125 4	125 5				
a	130,0	130,0	130,0				
b	130,0	130,0	130,0				
c	104,0	104,0	104,0				
d	104,0	104,0	104,0				
e ø	6,5	6,5	6,5				
f	21,0	21,0	21,0				
h	50,0	50,0	50,0				
i	117,0	117,0	117,0				
k	129,0	129,0	129,0				
l ø	104,0	104,0	104,0				
m	1,0	1,0	1,0				
Leiter mm ² min	25	25	25				
Leiter mm ² max	70	70	70				