

panel mounting socket outlet, straight - flange 56x56,  
fixing centers 44x44




Product description	
BALS-Prd.-Nr	13658
EAN	4024941136587
product group	Panel mounting socket outlet Quick-Connect, straight
current	16A
number of poles	3p
Arrangement of the phases	2P+PE
position of earth contact	7 h
voltage (V)	480 up to 500V

Product description	
frequency	50 and 60Hz
protection degree	IP44
colour code	black RAL 9005
Colour of appliance	Hinged lid black, Enclosure grey
connection design	screwless sping/cage/kontex
maximum conductor size (LQ)	4,0 qmm
cable entry (KE)	null
Height	72mm
Width	56mm
Depth	89mm
Flange size vertical	56mm
Flange size horizontal	56mm
Drill hole distance vertical	44mm
Drill hole distance horizontal	44mm
material of enclosure	Polyamide
contact	The contact carrier is made of polyamide, The contacts are brass

Logistics data	
Weight/pcs	0.087 kg / Piece
Packaging	Carton
Content amount	10 ST

Logistics data	
EAN	4024941828918
Length	207 mm
Width	162 mm
Height	142 mm
Weight	0.97 kg
Volume	3,750 ccm

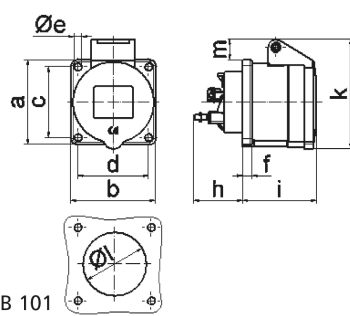

Ampere	16	16				
Polzahl	3	4				
a	56,0	60,0				
b	56,0	60,0				
c	44,0	50 - 52				
d	44,0	50 - 52				
e ø	4,4	5,5				
f	7,0	7,0				
h	35,5	35,5				
i	51,0	53,0				
k	70,0	80,0				
l ø	45,0	45,0				
m	13,0	9,0				
Leiter mm <sup>2</sup> min	1,5	1,5				
Leiter mm <sup>2</sup> max	4	4				

4 MB 101