

panel mounting socket outlet, straight - flange 72x65,
fixing centers 52x52




| Product description | |
|---------------------------|--|
| BALS-Prd.-Nr | 13724 |
| EAN | 4024941137249 |
| product group | Panel mounting socket outlet Quick-Connect, straight |
| current | 16A |
| number of poles | 4p |
| Arrangement of the phases | 3P+PE |
| position of earth contact | 4 h |
| voltage (V) | 100 up to 130V |

| Product description | |
|--------------------------------|--|
| frequency | 50 and 60Hz |
| protection degree | IP67 |
| colour code | yellow RAL 1012 |
| Colour of appliance | Hinged lid yellow, Bayonet ring grey, Enclosure grey |
| connection design | screwless sping/cage/kontex |
| maximum conductor size (LQ) | 4,0 qmm |
| cable entry (KE) | null |
| Height | 84mm |
| Width | 79mm |
| Depth | 91mm |
| Flange size vertical | 72mm |
| Flange size horizontal | 65mm |
| Drill hole distance vertical | 52mm |
| Drill hole distance horizontal | 52mm |
| material of enclosure | Polyamide |
| contact | The contact carrier is made of polyamide, The contacts are brass |

| Logistics data | |
|----------------|----------------|
| Weight/pcs | 0.0 kg / Piece |
| Packaging | Bag |
| Content amount | 1 ST |

| Logistics data | |
|----------------|---------------|
| EAN | 4024941137249 |
| Length | 91 mm |
| Width | 79 mm |
| Height | 84 mm |
| Weight | 0.001 kg |
| Volume | 603.876 ccm |
| Packaging | Carton |
| Content amount | 10 ST |
| EAN | 4024941830058 |
| Length | 245 mm |
| Width | 177 mm |
| Height | 185 mm |
| Weight | 0.133 kg |
| Volume | 7,140 ccm |

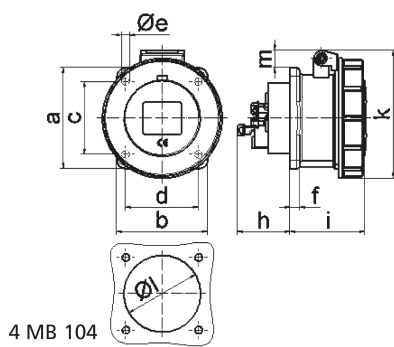

| Ampere | 16 | 16 | 16 | | | | |
|----------------------------|------|------|------|--|--|--|--|
| Polzahl | 3 | 4 | 5 | | | | |
| a | 62,0 | 72,0 | 72,0 | | | | |
| b | 62,0 | 65,0 | 65,0 | | | | |
| c | 47,0 | 52,0 | 52,0 | | | | |
| d | 47,0 | 52,0 | 52,0 | | | | |
| e ø | 5,5 | 5,5 | 5,5 | | | | |
| f | 7,0 | 7,0 | 7,0 | | | | |
| h | 35,5 | 35,5 | 35,5 | | | | |
| i | 57,0 | 58,0 | 57,0 | | | | |
| k | 76,0 | 83,0 | 93,0 | | | | |
| l ø | 45,0 | 45,0 | 55,0 | | | | |
| m | 10,0 | 9,0 | 13,0 | | | | |
| Leiter mm ² min | 1,5 | 1,5 | 1,5 | | | | |
| Leiter mm ² max | 4 | 4 | 4 | | | | |

4 MB 104