

panel mounting socket outlet, straight - flange 75x75,  
fixing centers 60x60




| Product description       |   |
|---------------------------|---|
| BALS-Prd.-Nr              | 13776   |
| EAN                       | 4024941137768   |
| Product category          | TE panel mounting socket outlet Quick-Connect, straight |
| Current                   | 32A   |
| Number of poles           | 4p  |
| Number of poles           | 3P+PE   |
| Position of earth contact | 7 h   |
| Voltage                   | 480 up to 500V  |

| Product description            |  |
|--------------------------------|--|
| Frequency                      | 50 and 60Hz  |
| Protection degree              | IP44   |
| Colour code                    | black RAL 9005   |
| Colour of appliance            | Hinged lid black RAL 9005, Enclosure grey RAL 7035   |
| Connection design              | screwless sping/cage/kontex  |
| Maximum conductor size         | 10,0 qmm   |
| Cable entry                    | null   |
| Height                         | 91mm   |
| Width                          | 75mm   |
| Depth                          | 115mm  |
| Flange size vertical           | 75mm   |
| Flange size horizontal         | 75mm   |
| Drill hole distance vertical   | 60mm   |
| Drill hole distance horizontal | 60mm   |
| Material of enclosure          | Polyamide  |
| Contact                        | The contact carrier is made of high temperature resistant material, the contacts are brass nickel plated |

| Logistics data |                  |
|----------------|------------------|
| Weight/pcs     | 0.185 kg / Piece |
| Packaging      | Bag              |
| Content amount | 1 ST             |

| Logistics data |               |
|----------------|---------------|
| EAN            | 4024941137768 |
| Length         | 115 mm        |
| Width          | 75 mm         |
| Height         | 91 mm         |
| Weight         | 0.186 kg      |
| Packaging      | Carton        |
| Content amount | 10 ST         |
| EAN            | 4024941831291 |
| Length         | 128 mm        |
| Width          | 225 mm        |
| Height         | 399 mm        |
| Weight         | 2.109 kg      |
| Volume         | 11,491.2 ccm  |

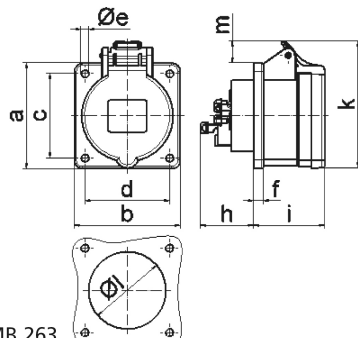

4 MB 263

| Ampere Polzahl             | 16<br>3 | 16<br>4 | 16<br>5 | 32<br>3 | 32<br>4 | 32<br>5 |
|----------------------------|---------|---------|---------|---------|---------|---------|
| a                          | 75,0    | 75,0    | 75,0    | 75,0    | 75,0    | 75,0    |
| b                          | 75,0    | 75,0    | 75,0    | 75,0    | 75,0    | 75,0    |
| c                          | 60,0    | 60,0    | 60,0    | 60,0    | 60,0    | 60,0    |
| d                          | 60,0    | 60,0    | 60,0    | 60,0    | 60,0    | 60,0    |
| e ø                        | 5,5     | 5,5     | 5,5     | 5,5     | 5,5     | 5,5     |
| f                          | 7,0     | 7,0     | 7,0     | 8,0     | 8,0     | 8,0     |
| h                          | 35,5    | 35,5    | 35,5    | 46,0    | 46,0    | 46,0    |
| i                          | 50,0    | 50,0    | 51,0    | 60,0    | 60,0    | 60,0    |
| k                          | 74,0    | 84,0    | 91,0    | 94,0    | 94,0    | 102,0   |
| l ø                        | 45,0    | 45,0    | 55,0    | 60,0    | 60,0    | 60,0    |
| m                          | 8,0     | 12,0    | 16,0    | 17,0    | 17,0    | 22,0    |
| Leiter mm <sup>2</sup> min | 1,5     | 1,5     | 1,5     | 2,5     | 2,5     | 2,5     |
| Leiter mm <sup>2</sup> max | 4       | 4       | 4       | 10      | 10      | 10      |