

wall mounting socket outlet, switched, interlocked - housing dimensions 460x180




| Product description | |
|---------------------------|---|
| BALS-Prd.-Nr | 16620 |
| EAN | 4024941166201 |
| product group | TE wall mounting socket outlet, switched, interlocked |
| current | 125A |
| number of poles | 3p |
| Arrangement of the phases | 2P+PE |
| position of earth contact | 6 h |
| voltage (V) | 200 up to 250V |

| Product description | |
|-----------------------------|---|
| frequency | 50 and 60Hz |
| protection degree | IP67 |
| colour code | blue RAL 5015 |
| Colour of appliance | Hinged lid blue, Bayonet ring grey, Housing screws grey, Housing bottom grey, Housing top grey, Control knob grey |
| connection design | kontex contact |
| maximum conductor size (LQ) | 70.0 qmm |
| cable entry (KE) | top entry M40, bottom entry M50/M40 |
| Height | 512mm |
| Width | 180mm |
| Depth | 210mm |
| dimension of enclosure (GG) | 460x180 mm (HxW) |
| material of enclosure | Polycarbonate |
| contact | The contact carrier is made of high temperature resistant material, the contacts are brass nickel plated |

| Additional technical information | |
|----------------------------------|--|
| | The cable entry is one at top and two at bottom open |
| | In 0-position lockable for 4 padlocks with bow diameter up to 7 mm |

| Logistics data | |
|----------------|----------------|
| Weight/pcs | 0.0 kg / Piece |

| Logistics data | |
|----------------|---------------|
| Packaging | Carton |
| Content amount | 1 ST |
| EAN | 4024941166201 |
| Length | 560 mm |
| Width | 215 mm |
| Height | 260 mm |
| Weight | 0.462 kg |
| Volume | 26,400 ccm |

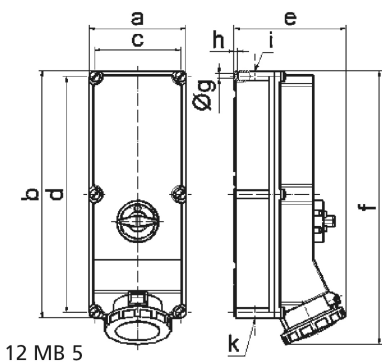

| Ampere Polzahl | 125 3 | 125 4 | 125 5 |
|----------------|--------|--------|--------|
| a | 180,0 | 180,0 | 180,0 |
| b | 460,0 | 460,0 | 460,0 |
| c | 160,0 | 160,0 | 160,0 |
| d | 440,0 | 440,0 | 440,0 |
| e | 208,0 | 208,0 | 208,0 |
| f | 510,0 | 510,0 | 510,0 |
| g ø | 8,3 | 8,3 | 8,3 |
| h | 6,5 | 6,5 | 6,5 |
| i | M40 | M40 | M40 |
| k | M40/50 | M40/50 | M40/50 |