

angled plug - with inward-curving cable sleeve




Product description	
BALS-Prd.-Nr	231
EAN	4024941002318
product category (PG)	GT angled plug
current (A)	16A
number of poles (P99)	3p
number of poles (P)	2P+PE
position of earth contact (H)	6 h
voltage (V)	200 up to 250V
frequency (HZ)	50 and 60Hz

Product description	
protection degree (SA)	IP44
colour code 1 (KF1)	blue RAL 5015
Colour of appliance	Collar blue, anti-kink sleeve grey, Enclosure grey
connection design (AT)	screw terminal
maximum conductor size (LQ)	2,5 qmm
cable entry (KE)	Anti-kink sleeve
Height	89mm
Width	78mm
Depth	51mm
material of enclosure (GM)	Polyamide
contact	The contact carrier is made of polyamide, The contacts are brass

Additional technical information	
	With internal cable sleeve

Logistics data	
Weight/pcs	0.125 kg / Piece
Packaging	Bag
Content amount	1 ST
EAN	4024941002318
Length	51 mm

Logistics data	
Width	78 mm
Height	89 mm
Weight	0.126 kg
Volume	354.042 ccm
Packaging	Carton
Content amount	10 ST
EAN	4024941968201
Length	275 mm
Width	175 mm
Height	137 mm
Weight	1.375 kg
Volume	5,737.5 ccm

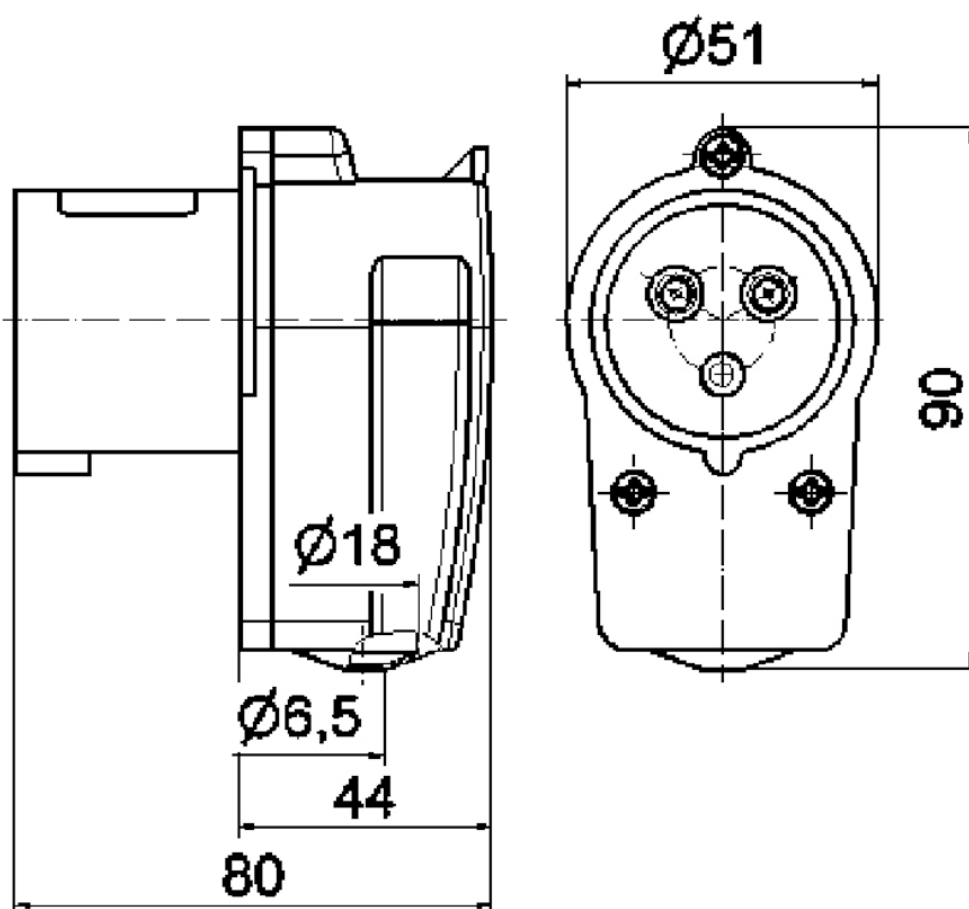

2 MB 156