

flange 85x85, fixing centers 70x70



Product description	
BALS-Prd.-Nr	27043
EAN	4024941270434
product category	TN panel mounting appliance inlet, angled
current	32A
number of poles	5p
number of poles	3p+N+PE
position of earth contact	2 h
voltage	> 50V
frequency	over 300 up to 500Hz

Product description	
VG-Type-No.:	VG 96919 BP 008
Supplynumber:	5935-12-312-4195
protection degree	IP67
colour code	bronze-green RAL 6031-F9
Colour of appliance	Bayonet ring bronze-green, Collar bronze-green, Closure cap bronze-green, Enclosure bronze-green
connection design	screw terminal
maximum conductor size	6,0 qmm
cable entry	null
Height	107mm
Width	101.5mm
Depth	104mm
Flange size vertical	85mm
Flange size horizontal	85mm
Drill hole distance vertical	70mm
Drill hole distance horizontal	70mm
material of enclosure	Polyamide
contact	The contact carrier is made of high temperature resistant material, the contacts are brass nickel plated


Additional technical information	
	The inclination is 10°

Additional technical information

With closure cap

Logistics data

Weight/pcs	0.365 kg / Piece
Packaging	Carton
Content amount	10 ST
EAN	4024941839402
Length	325 mm
Width	217 mm
Height	210 mm
Weight	3.856 kg
Volume	13,588.4 ccm

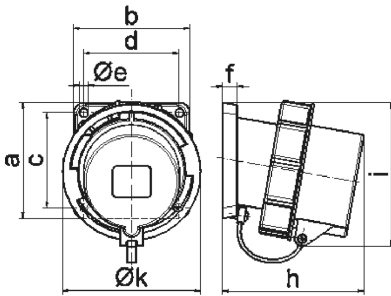

5 MB 31

Ampere	16	16	16	32	32	32
Polzahl	3	4	5	3	4	5
a	85,0	85,0	85,0	85,0	85,0	85,0
b	85,0	85,0	85,0	85,0	85,0	85,0
c	70,0	70,0	70,0	70,0	70,0	70,0
d	70,0	70,0	70,0	70,0	70,0	70,0
e ø	6,3	6,3	6,3	6,3	6,3	6,3
f	11,0	11,0	11,0	11,0	11,0	11,0
h	94,0	94,0	94,0	105,0	105,0	105,0
i	94,0	97,0	101,0	103,0	103,0	107,0
k	70,5	78,5	86,5	94,0	94,0	101,5
Leiter mm ² min	1,0	1,0	1,0	2,5	2,5	2,5
Leiter mm ² max	2,5	2,5	2,5	6,0	6,0	6,0