

with cable gland, with bayonet cover





Product description	
BALS-Prd.-Nr	310167
EAN	4024941108515
product group	Quick-Connect TN connector
current	16A
number of poles	4p
Arrangement of the phases	3P+PE
position of earth contact	11 h
voltage (V)	440 up to 460V
frequency	60Hz

Product description	
VG-Type-No.:	VG 96919 DS 021
protection degree	IP67
colour code	bronze-green RAL 6031-F9
Colour of appliance	Cable gland bronze-green, Bayonet ring bronze-green, Hinged lid bronze-green, Enclosure bronze-green
connection design	screwless sping/cage/kontex
maximum conductor size (LQ)	2,5 qmm
cable entry (KE)	Cable gland
Height	162mm
Width	79mm
Depth	84mm
material of enclosure	Polyamide
contact	The contact carrier is made of high temperature resistant material, the contacts are brass nickel plated

Additional technical information	
	For cable diameter from 8 up to max. 18 mm, Multi-Grip cable gland with gasket, integrated cable clamp and additional water evacuation openings
	With bayonet cover on strap

Logistics data	
Weight/pcs	0.202 kg / Piece
Packaging	Bag

Logistics data	
Content amount	1 ST
EAN	4024941108515
Length	84 mm
Width	79 mm
Height	162 mm
Weight	0.203 kg
Volume	1,075.032 ccm
Packaging	Carton
Content amount	10 ST
EAN	4024941839853
Length	258 mm
Width	183 mm
Height	212 mm
Weight	2.172 kg
Volume	8,750 ccm

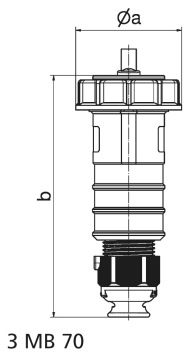

Ampere Polzahl	16 3	16 4	16 5	32 3	32 4	32 5
a ø	70,5	78,0	86,5	94,0	94,0	101,5
b	161,0	161,0	168,0	196,0	196,0	200,0
c	77,0	83,0	93,0	99,0	99,0	107,0
d ø	18,0	18,0	21,0	23,0	23,0	27,0
Leiter mm <sup>2</sup> min	1,0	1,0	1,0	2,5	2,5	2,5
Leiter mm <sup>2</sup> max	2,5	2,5	2,5	6,0	6,0	6,0