


connector - with screwless terminals, lockable

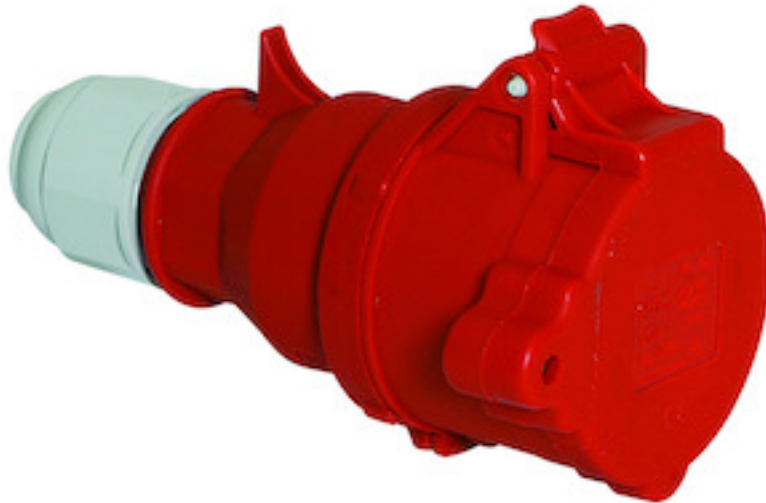

| Product description | |
|---------------------------|-------------------------|
| BALS-Prd.-Nr | 310635 |
| EAN | 4024941197540 |
| product group | Qucik-Connect connector |
| current | 32A |
| number of poles | 5p |
| Arrangement of the phases | 3p+N+PE |
| position of earth contact | 6 h |
| voltage (V) | 200/346 up to 240/415V |
| frequency | 50 and 60Hz |

| Product description | |
|-----------------------------|--|
| protection degree | IP44 |
| colour code | red RAL 3000 |
| Colour of appliance | Housing cover red, Collar red, Hinged lid red, Cable gland grey |
| connection design | screwless spring-clamp |
| maximum conductor size (LQ) | 6,0 qmm |
| cable entry (KE) | Cable gland |
| Height | 188mm |
| Width | 92mm |
| Depth | 102mm |
| material of enclosure | Polyamide |
| contact | The contact carrier is made of polyamide, the contacts are brass nickel plated |

| Additional technical information | |
|----------------------------------|--|
| | Multi-Grip cable gland with gasket and integrated strain relief, Screwless housing connection with snap fastening, The connector is lockable with the plug art.-no. 210951 and padlock art.no. 580642, For cable diameter from 11 up to max. 23,5 mm |

| Logistics data | |
|----------------|------------------|
| Weight/pcs | 0.297 kg / Piece |
| Packaging | Bag |
| Content amount | 1 ST |
| EAN | 4024941197540 |

| Logistics data | |
|----------------|---------------|
| Length | 102 mm |
| Width | 92 mm |
| Height | 188 mm |
| Weight | 0.298 kg |
| Volume | 1,764.192 ccm |
| Packaging | Carton |
| Content amount | 10 ST |
| EAN | 4024941825665 |
| Length | 325 mm |
| Width | 217 mm |
| Height | 210 mm |
| Weight | 3.176 kg |
| Volume | 13,588.4 ccm |

